

SERIES 326


BLADE MICROMETER



- ◆ Measure the small groove diameter
- ◆ Graduation: 0.01mm
- ◆ Non-rotating spindle
- ◆ Ratchet stop
- ◆ Setting standards are included (except 0-25mm)






326-001-03

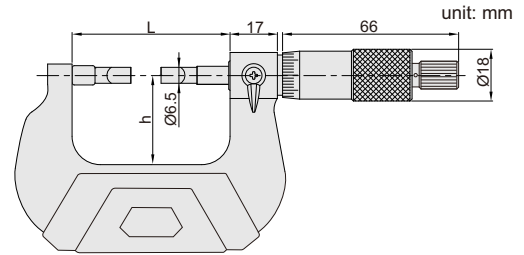

Setting standards (included)



Application



Code	Range	Anvil	Accuracy	h	L	Setting standards (included)
326-001-03	0-25mm	A	4µm	35	57	-
326-002-03	25-50mm	A	4µm	46	82	25mm
326-003-03	50-75mm	A	5µm	58	107	50mm
326-004-03	75-100mm	A	5µm	70	133	75mm
326-005-03	100-125mm	A	6µm	83	158	100mm
326-006-03	125-150mm	A	6µm	96	183	125mm
326-007-03	150-175mm	A	7µm	109	209	150mm
* NEW 326-008-03	175-200mm	A	7µm	130	234	175mm
* NEW 326-009-03	200-225mm	A	8µm	142	260	200mm
* NEW 326-010-03	225-250mm	A	8µm	155	285	225mm
* NEW 326-011-03	250-275mm	A	9µm	168	310	250mm
* NEW 326-012-03	275-300mm	A	9µm	178	337	275mm
326-001-04	0-25mm	B	4µm	35	57	-
326-002-04	25-50mm	B	4µm	46	82	25mm
* NEW 326-003-04	50-75mm	B	5µm	58	107	50mm
* NEW 326-004-04	75-100mm	B	5µm	70	133	75mm
* NEW 326-005-04	100-125mm	B	6µm	83	158	100mm
* NEW 326-006-04	125-150mm	B	6µm	96	183	125mm
* NEW 326-007-04	150-175mm	B	7µm	109	209	150mm
* NEW 326-008-04	175-200mm	B	7µm	130	234	175mm
* NEW 326-009-04	200-225mm	B	8µm	142	260	200mm
* NEW 326-010-04	225-250mm	B	8µm	155	285	225mm
* NEW 326-011-04	250-275mm	B	9µm	168	310	250mm
* NEW 326-012-04	275-300mm	B	9µm	178	337	275mm