

- ◆ Graduation 0.01mm
- ◆ Measure width of grooves inside bores
- ◆ Non-rotating spindle
- ◆ Two graduations for inside and outside measurement



344-004-01



344-002-11



Two-directional ratchet stop

Code	Range (outside B)	Range (inside A)	Accuracy	Ød	Ød1	Ød2	L
344-001-11	0-25mm	1.6-26.5mm	10µm	13	6.5	10	102
344-002-11	25-50mm	26.5-51.5mm	10µm	13	6.5	10	102
344-003-11	50-75mm	51.5-76.5mm	10µm	13	6.5	10	102
344-004-11	75-100mm	76.5-101.5mm	10µm	13	6.5	10	102
344-001-12	0-25mm	1.6-26.5mm	10µm	6.5	3	5	90

No ratchet stop

Code	Range (outside B)	Range (inside A)	Accuracy	Ød	Ød1	Ød2	L
344-001-01	0-25mm	1.6-26.5mm	10µm	13	6.5	10	102
344-002-01	25-50mm	26.5-51.5mm	10µm	13	6.5	10	102
344-003-01	50-75mm	51.5-76.5mm	10µm	13	6.5	10	102
344-004-01	75-100mm	76.5-101.5mm	10µm	13	6.5	10	102
344-001-02	0-25mm	1.6-26.5mm	10µm	6.5	3	5	90

*344-001-02 and 344-001-12 do not have sleeve.

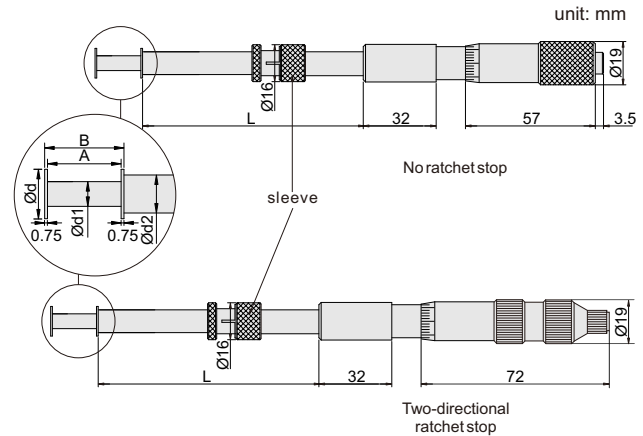

MICROMETER