






- ◆ For quick finding the current leakage or short circuit position when repairing PCBA
- ◆ For simulating the heating condition of the PCBA in a closed environment when designing
- ◆ With high limit alarm
- ◆ With software, data can be exported to Excel
- ◆ Flexible stand

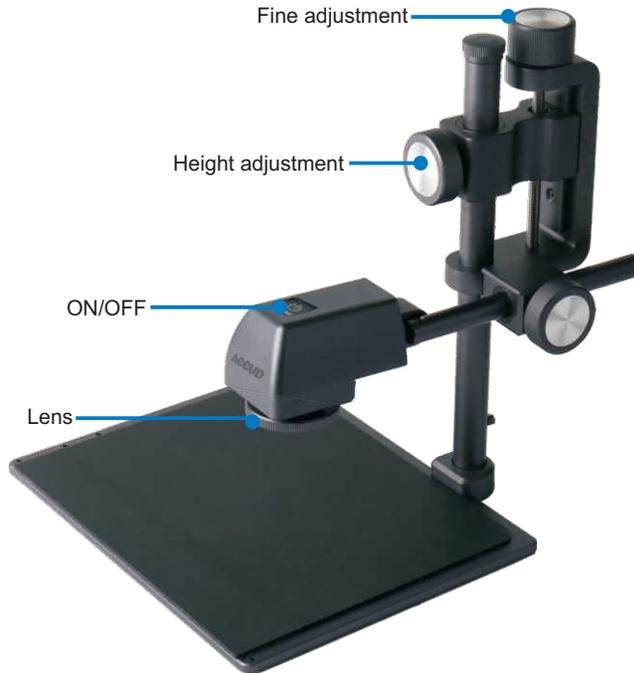


Measure

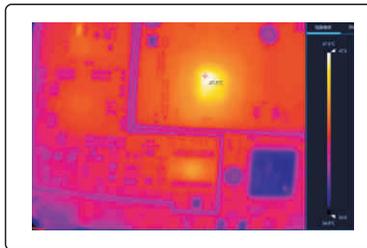


Compare

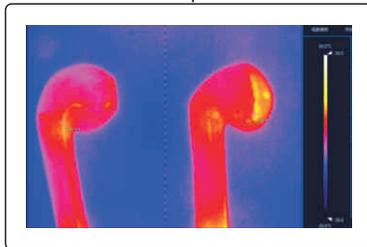

3D Graph

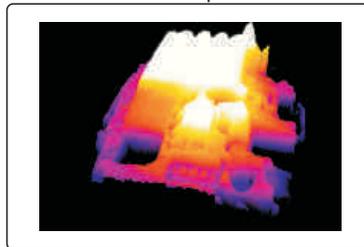

Quick Locating

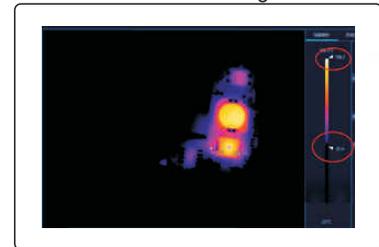

SPECIFICATION

IR image	Resolution	260x200
	Measuring range	-10°C - 120°C
	Accuracy	±3°
	Frame rate	25Hz
	Field of view	Horizontal:34.4°, vertical: 25.8°
	Lens	Ø4mm
	Emissivity	0.1-1(adjustable)
Data output	USB (Type C)	
Working temperature	-10°C-55°C	
Protection level	IP54	
Power supply	DC 5V	
Size	220×172×241mm	
Weight	1.6kg	

INCLUDED ACCESSORIES

Main unit	1pc
Stand	1pc
USB cable and software	1pc
AC/DC adapter	1pc