



VIDEO

- ◆ Can store 10 measuring programs, and the program can be switched quickly
- ◆ Data storage function, support manual and automatic storing, 1000 groups data can be stored
- ◆ Automatically detect internal or external dimension measurement
- ◆ Automatic grouping function for workpiece sorting


LED column

zero point

Application



Back of display

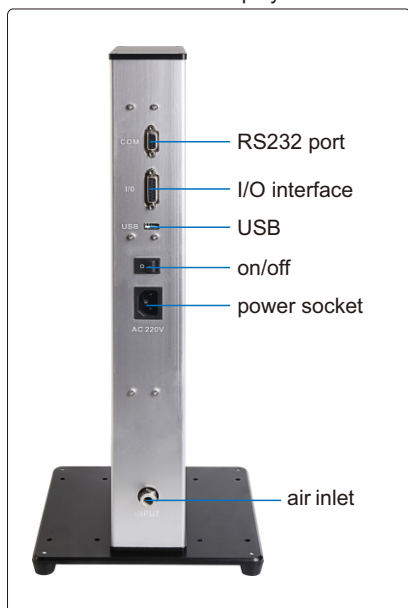

RS232 port

I/O interface

USB

on/off

power socket

air inlet

display

key panel

air outlet

rate regulating valve

Air filter and pressure regulating valve



Work in groups



### SPECIFICATION

Code	595-101-01				
LED quantity	101 pcs				
LED color	red, orange, green				
LED height	254mm				
Range	10μm	20μm	50μm	100μm	
Resolution	LED column	0.1μm	0.2μm	0.5μm	1μm
	Display	0.1μm			
Accuracy	0.2μm	0.4μm	0.5μm	1μm	
Air supply	dir and clean, 0.4~0.8MPa				
Output	RS232/USB, I/O interface				
Operation temperature	0~45°C				
Power	100-240V, 50/60Hz				
Power consumption	<20W				
Max. current	2A				
Dimension(LxWxH)	170x65x475mm				
Weight	3kg				

### OPTIONAL ACCESSORIES

Air filter
Pressure regulating valve
RS232 cable

unit: mm

