



- ◆ For inside micrometer and bore gage setting
- ◆ The size marked on the setting ring is checked at the direction of the marking line
- ◆ Size difference (difference between the ordered size and the size marked on the setting ring when supplied): For example, the ordered size is 20mm, the real size marked on the setting ring when supplied may be 20.003mm
- ◆ Range: Ø2-300mm

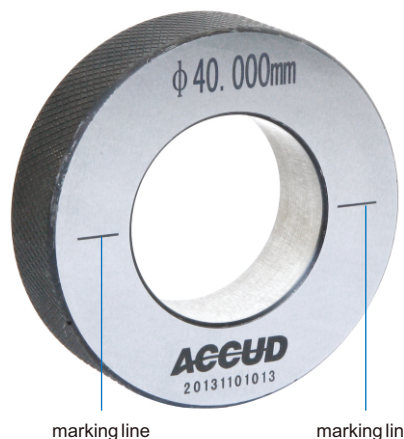

**531-040-01**

Application



Diameterd	Size difference	Roundness and cylindricity	Accuracy
Ø2~≤10	±3.0µm	0.4µm	±1.5µm
Ø10~≤20		0.5µm	
Ø20~≤30		0.6µm	
Ø30~≤50		0.7µm	
Ø50~≤80		0.8µm	
Ø80~≤100		1.0µm	
Ø100~≤130	±5.0µm	1.0µm	±2µm
Ø130~≤150		1.2µm	
Ø150~≤210		1.5µm	
Ø210~≤250		2.5µm	
Ø250~≤300		3.0µm	
			±2.5µm

Code	Size(mm)
531-002-01	Ø2
531-003-01	Ø3
531-004-01	Ø4
531-005-01	Ø5
531-006-01	Ø6
531-007-01	Ø7
531-008-01	Ø8
531-009-01	Ø9
531-010-01	Ø10
531-011-01	Ø11
531-012-01	Ø12
531-013-01	Ø13
531-014-01	Ø14
531-015-01	Ø15
531-016-01	Ø16
531-017-01	Ø17
531-018-01	Ø18
531-019-01	Ø19

Code	Size(mm)
531-020-01	Ø20
531-021-01	Ø21
531-022-01	Ø22
531-023-01	Ø23
531-024-01	Ø24
531-025-01	Ø25
531-026-01	Ø26
531-027-01	Ø27
531-028-01	Ø28
531-029-01	Ø29
531-030-01	Ø30
531-031-01	Ø31
531-032-01	Ø32
531-033-01	Ø33
531-034-01	Ø34
531-035-01	Ø35
531-036-01	Ø36
531-037-01	Ø37

Code	Size(mm)
531-038-01	Ø38
531-039-01	Ø39
531-040-01	Ø40
531-041-01	Ø41
531-042-01	Ø42
531-043-01	Ø43
531-044-01	Ø44
531-045-01	Ø45
531-046-01	Ø46
531-047-01	Ø47
531-048-01	Ø48
531-049-01	Ø49
531-050-01	Ø50
531-055-01	Ø55
531-060-01	Ø60
531-062-01	Ø62
531-065-01	Ø65
531-070-01	Ø70

Code	Size(mm)
531-075-01	Ø75
531-080-01	Ø80
531-085-01	Ø85
531-087-01	Ø87
531-090-01	Ø90
531-095-01	Ø95
531-100-01	Ø100
531-125-01	Ø125
531-150-01	Ø150
531-175-01	Ø175
531-200-01	Ø200
531-225-01	Ø225
531-250-01	Ø250
531-275-01	Ø275
531-300-01	Ø300

